


HS-2000A

Fixed internal radius	600 mm
Minimum width	200 mm
Open area	0%
Approved	FDA
Rod	Ø 4,5 mm
Flight	No
Side guard	No
Curve	Yes

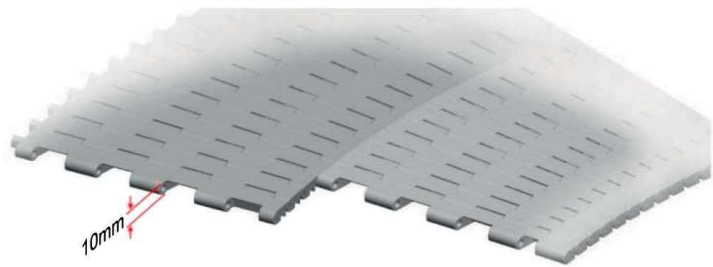

DATA


Belt material	Belt strenght		Temperature	
	Straight		°C [min.]	°C [max.]
	kg/m[BW]	N/m[BW]		
Polypropylene	1600	16000	1	100
Polyethylene	1550	15500	-60	60
Acetal	2640	26400	-40	80
Nylon	2230	22300	1	180

BW - belt width

COLOR TABLE

Polypropylene					Polyethylene					Acetal					Nylon				
W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B
●	●						●			●				●				●	

W - White, G - Grey, N - Nature, DB - Dark brown, B-Blue

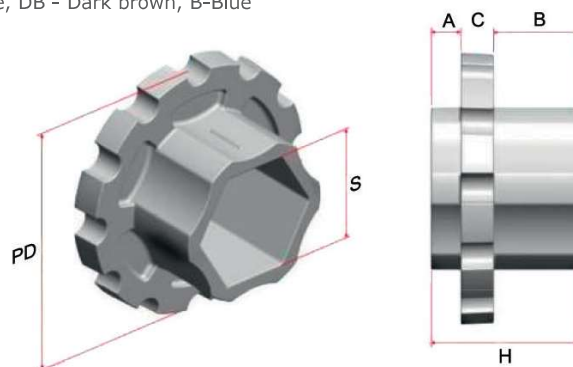

SPROCKET DIMENSIONS

Belt Width	Sprocket No.	PD [mm]	S [mm]	A [mm]	B [mm]	C [mm]	H [mm]
200	1	65	41.5	35	0	11	46
	2	72		10	29		50
400	3	82		10	29		
	4	92		10	29		
600	5	101		10	29		
	6	111		10	29		
800	7	121		10	29		
	8	130		10	29		
1000	9	140		10	29		
	10	150		10	29		
1200	11	159,5		10	29		
	12	169		10	29		
1400	13	179		10	29		
	14	188,5		10	29		